


SERIES - S SIZE - 0 SPRING LOADED TEST PROBES

.050" (1,27) CENTERS / .100" (2,54) STROKE



TIP STYLES

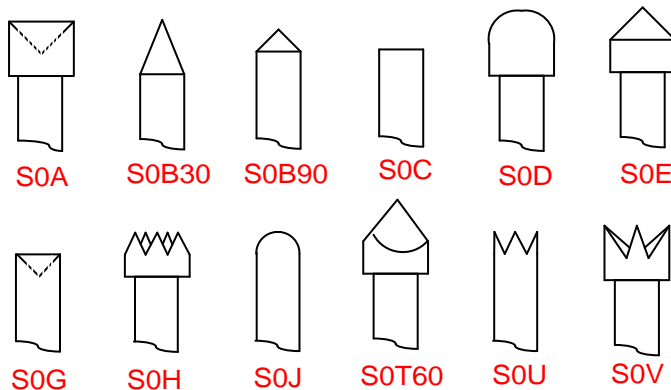

PROBE TECHNICAL DATA

Recommended Minimum Centers - .050" (1,27)
 Current Rating - 3 amps continuous
 Spring Force - (2.2) (2.5) or (3.7) oz. @ .070 (1,78) Travel
 Contact Resistance - Less then 35 milliohms
 Recommended Working Travel - .070 (1,78)

MATERIALS

Contact Barrel - Nickel / Silver, Gold Plated.
 Spring - Beryllium Copper, Stainless Steel or Music Wire, Gold Plated.
 Plunger - Full-Hard Beryllium Copper, Gold Plated over Nickel.

How To Order: **SERIES** **SIZE** **TIP STYLE** **SPRING FORCE** **PLATING**
 Example **S** **0** **S0A** **2.2** **G**

RECEPTACLES

RECEPTACLE SIZE-0 DATA

Style : Solder Cup
 Style : Wire Wrap .025" Sq. Post.
 Style : Preattached Wire 36" Long.
 Drill Size : #64
 Mounting Hole Size : .035"/.0365"

MATERIAL:

Nickel / Silver, Gold Plated.
 Wire Wrap Post Gold Plated.

