


SPRING PLUNGER BATTERY CONTACTS

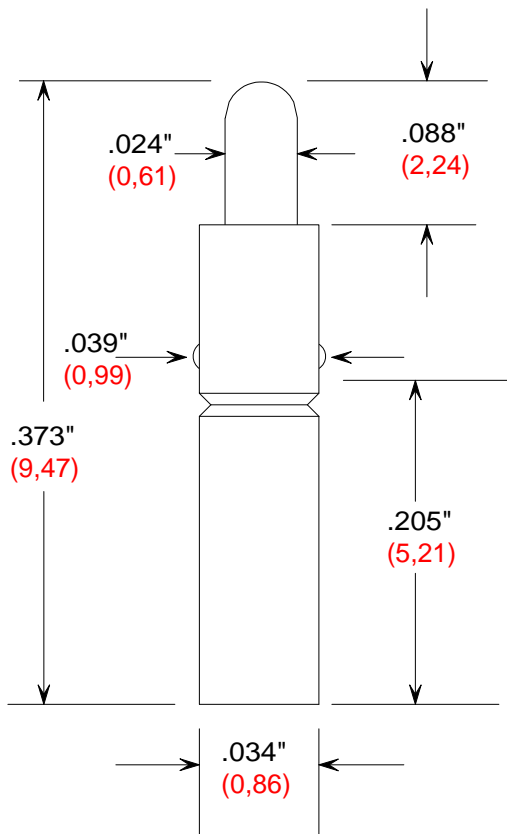


PART NUMBER TX - 100803 - 1.3

Reccommended Minimum Centers -- .050" (1,27).
 Current Rating -- 3 amps continuous.
 Reccommended working Travel -- .050" (1,27).
 Spring Force -- 1.3 oz. @ .050" (1,27) Travel.

Materials:

Contact Barrel -- Nickel / Silver.
 Spring -- Stainless Steel Gold Plated
 Pungner -- Full-Hard Beryllium Copper
 Gold Plated.

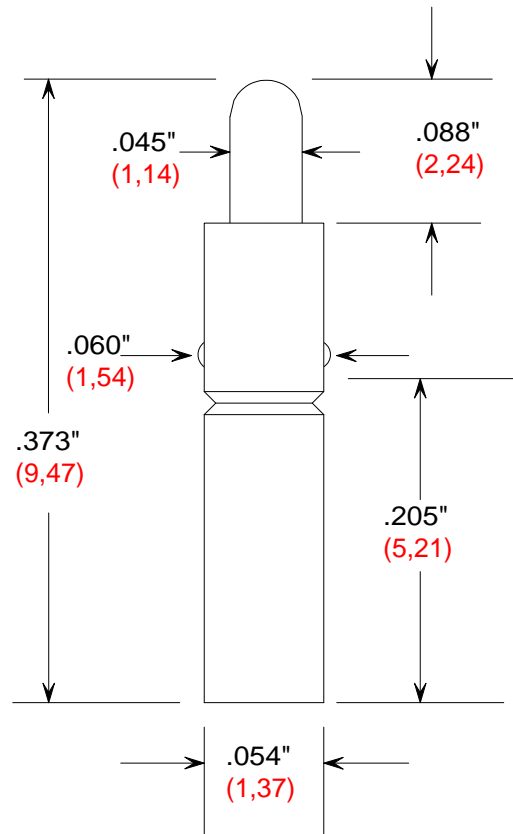

PART NUMBER TX - 100737 - 2.2

Reccommended Minimum Centers -- .100" (2,54).
 Current Rating -- 3 amps continuous.
 Reccommended working Travel -- .050" (1,27).
 Spring Force -- 2.2 oz. @ .050" (1,27) Travel.

Materials:

Contact Barrel -- Nickel / Silver.
 Spring -- Stainless Steel Gold Plated
 Pungner -- Full-Hard Beryllium Copper
 Gold Plated.