



SPRING PLUNGER BATTERY CONTACTS

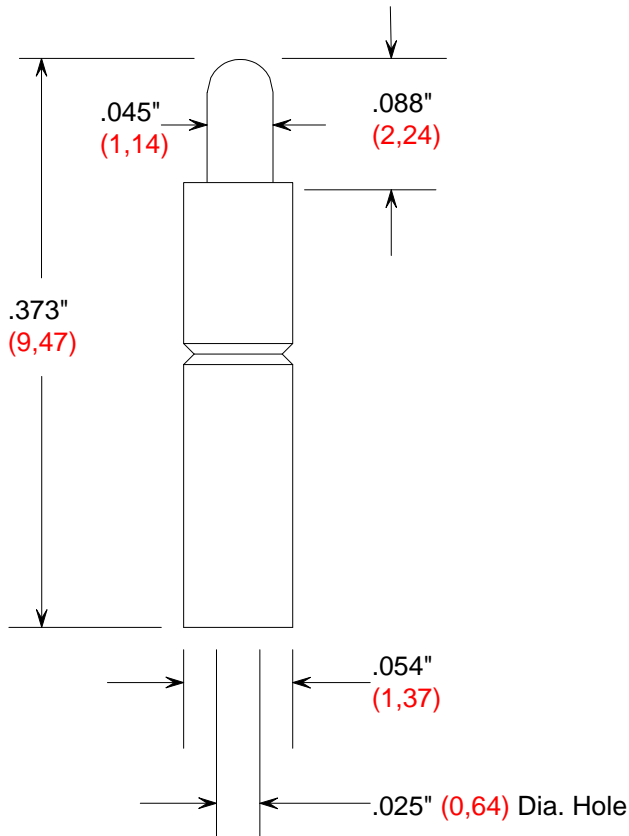

PART NUMBER 3.8 oz. TX - 100165 - 3.8
 PART NUMBER 7.0 oz. TX - 100165 - 7.0

Recommended Minimum Centers -- .100" (2,54).
 Current Rating -- 3 amps continuous.
 Recommended working Travel -- .050" (1,27).
 Spring Force -- 3.8 oz. @ .050" (1,27) Travel.
 7.0 oz. @ .050" (1,27) Travel.

Materials:
 Contact Barrel -- Nickel / Silver, Gold Plated.
 Spring -- 3.8 oz. Stainless Steel, Gold Plated.
 7.0 oz. Music Wire, Gold Plated.
 Plunger -- Full-Hard Beryllium Copper
 Gold Plated over Nickel.

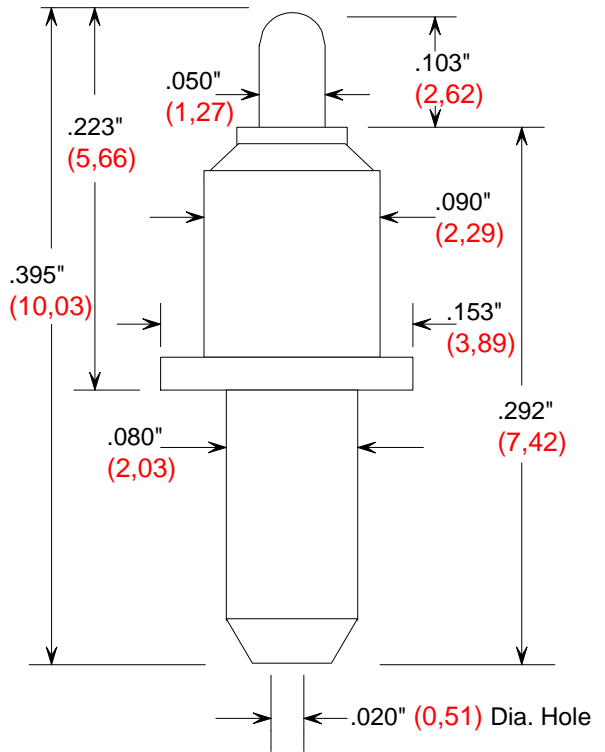

PART NUMBER TX - 100410 - 05

Recommended Minimum Centers -- .200" (5,08).
 Current Rating -- 3 amps continuous.
 Recommended working Travel -- .060" (1,52).
 Spring Force -- 6.2 oz. @ .060" (1,52) Travel.

Materials:
 Contact Barrel -- Nickel / Silver.
 Spring -- Stainless Steel.
 Plunger -- Full-Hard Beryllium Copper
 Gold Plated over Nickel.

TEST-X FIXTURE PRODUCTS
www.test-x.com

7117 Arlington Ave. Ste. G
 Riverside, CA 92503
 pH. 951-688-3067 Fax 951-688-1543